

## PC01\_CKAS\_LCUS\_A327T\_XX.X\_SS

### Description

Simplex patch cord, CLIK! , APC to LC classic, UPC, simplex 2.7mm\_XX.X\_yellow, SM G.657A3



Features	Features
- Miniaturised space-saving design (diameter < 5 mm!) fits every duct	- Push-pull mechanism for best handling and high packing density
- Robust push-pull connectors for reliable and quick installation	- One-piece design for easy termination
- Excellent mechanical and environmental performance	- Short rigid length
- Blind-mating excellent usability in tight environments	- Switchable duplex connectors

### Technical Data

#### General Data

Description	Values
General Typ	Simplex CLIK/LC patch cord
Operation temperature	-25 up to 70°C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

#### Connector left

Description	Values
Polish	APC
Color Housing	Metal
Color Boot	White
Design connector acc. To	IEC 61754-30
Performance class H+S	S
Insertion loss 97% dB / mean dB	0.45 / 0.2
Return Loss	60
Durability	1000
Tensile load	100 N
Tensile load acc. To GR-326-COR	Fullfiled

#### Connector right


Description	Values
Polish	UPC
Color Housing	Blue
Color Clip	Blue
Color Boot	Black
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	S
Insertion loss 97% dB / mean dB	0.45 / 0.2
Return Loss	50
Durability	1000
Tensile load	100 N
Tensile load acc. To GR-326-COR	Fullfiled

## PC01\_CKAS\_LCUS\_A327T\_XX.X\_SS

### Cable

Description	Values
Cable typ	Simplex Cable
Fiber count	1
Fiber	1 x 0.9 mm
Fiber type	E9/125-SM G.657.A3
Outer diameter	2.7 mm
Outer jacket material	Jacket material according to UL 94V-0

### Technical Drawing

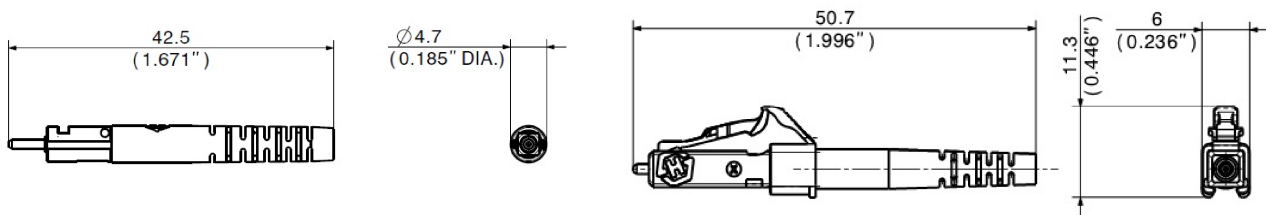

### Ordering information

Meter (m)	Item number	Description
0.3	85160044	PC01_CKAS_LCUS_A327T_00.3_SS