

PC01_CKAS_LHAS_A327T_XX.X_SS

Description

Simplex patch cord, CLIK! , APC to E2000 , APC, simplex 2.7mm_XX.X_yellow, SM G.657A3



Features	Features
<ul style="list-style-type: none"> - Miniaturised space-saving design (diameter < 5 mm!) fits every duct - Robust push-pull connectors for reliable and quick installation - Excellent mechanical and environmental performance - Blind-mating excellent usability in tight environments 	<ul style="list-style-type: none"> - Automatic metal shutter in connector for dust protection and laser safety - One-piece design for easy termination - Colour coding of connector - Mechanical coding of connector - Ideal for HighPower applications - Switchable duplex clips

Technical Data

General Data

Description	Values
General Typ	Simplex CLIK/FLSH patch cord
Operation temperature	-25 up to 70°C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

Connector left

Description	Values
Polish	APC
Color Housing	Metal
Color Boot	White
Design connector acc. To	IEC 61754-30
Performance class H+S	S
Insertion loss 97% dB / mean dB	0.45 / 0.2
Return Loss	60
Durability	1000
Tensile load	100 N
Tensile load acc. To GR-326-COR	Fullfiled

Connector right


Description	Values
Polish	APC
Color Housing	Green
Color Boot	Green
Design connector acc. To	IEC 61754-15, TIA 604-16
Performance class H+S	S
Insertion loss 97% dB / mean dB	0.45 / 0.2
Return Loss	60
Durability	1000
Tensile load	100 N
Tensile load acc. To GR-326-COR	Fullfiled

PC01_CKAS_LHAS_A327T_XX.X_SS

Cable

Description	Values
Cable typ	Simplex Cable
Fiber count	1
Fiber	1 x 0.9 mm
Fiber type	E9/125-SM G.657.A3
Outer diameter	2.7 mm
Outer jacket material	Jacket material according to UL 94V-0

Technical Drawing

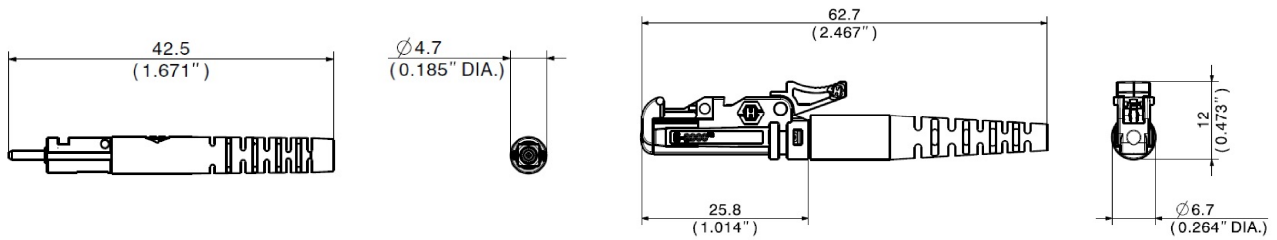

Ordering information

Meter (m)	Item number	Description
0.3	85160046	PC01_CKAS_LHAS_A327T_00.3_SS