


13	Score+ground wire. Wire gauge, power line 22AWG+signal line 28AWG	100	mm
12	Switching module Male Adapter Shell(Upon)Black	1	PCS
11	Switching module Male Adapter Shell(Bottom)Black	1	PCS
10	Switching module	1	PCS
9	Type B Male Shell (Bottom)Black	1	PCS
8	Type B Male Shell (Upon) Black	1	PCS
7	USB A Male Shell (Bottom)Black	1	PCS
6	USB A Male Shell (Upon) Black	1	PCS
5	Spring Lock	1	PCS
4	SR black	3	PCS
3	Type B Male PCBA	1	PCS
2	USB A Male PCBA	1	PCS
1	18AWG*2C+Fiber+F+A CPR OD: (OD4.5±0.2)mm	15000	mm
ITEM	SPECIFICATIONS	Q' TY	UNIT

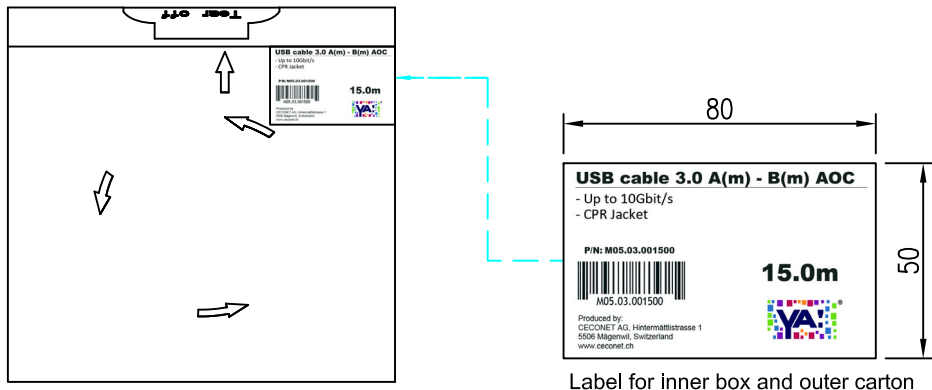

Label for inner box and outer carton

TOLERANCE		SCALE	SHEEL	DRAWN BY	DATE
.X	±0.25	1 : 1	1 OF 1	Kevin	17/03/2025
		REV.		CHECKED BY	DATE
.XX	±0.10	A			
ANGLES		MATERIAL		THIRD ANGLE PROJECTION	
		-			

<h1>USB Cable 3.0 A(m)-B(m)</h1> <h2>15M</h2>	
PART NO.	DWG.NO.
M05.03.001500	-

