
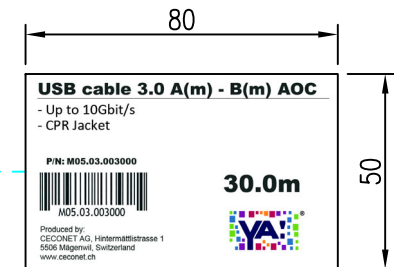


13	Score+ground wire. Wire gauge, power line 22AWG+signal line 28AWG	100	mm
12	Switching module Male Adapter Shell (Upon)Black	1	PCS
11	Switching module Male Adapter Shell (Bottom)Black	1	PCS
10	Switching module	1	PCS
9	Type B Male Shell (Bottom)Black	1	PCS
8	Type B Male Shell (Upon) Black	1	PCS
7	USB A Male Shell (Bottom)Black	1	PCS
6	USB A Male Shell (Upon) Black	1	PCS
5	Spring Lock	1	PCS
4	SR black	3	PCS
3	Type B Male PCBA	1	PCS
2	USB A Male PCBA	1	PCS
1	18AWG*2C+Fiber+F+A CPR OD: (OD4.5±0.2)mm	30000	mm
ITEM	SPECIFICATIONS	Q' TY	UNIT

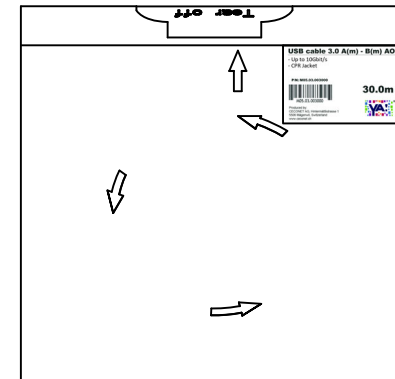

Label for inner box and outer carton

TOLERANCE	SCALE	SHEET	DRAWN BY	DATE
.X ±0.25	1 : 1	1 OF 1	Kevin	17/03/2025
.XX ±0.10	REV.	A	CHECKED BY	DATE
ANGLES ±0.5°	MATERIAL	-	THIRD ANGLE PROJECTION	

<h1>USB Cable 3.0 A(m)-B(m)</h1> <h2>30M</h2>	
PART NO.	DWG NO.
M05.03.003000	-

